


Ergophone

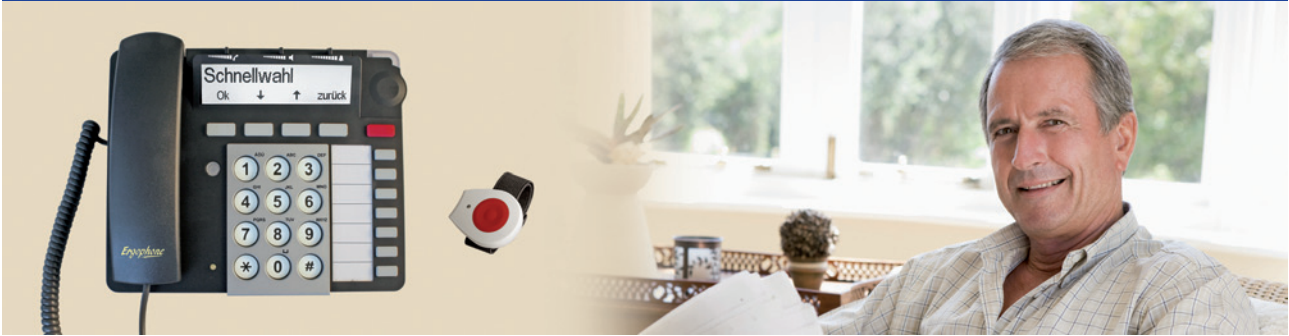

Ergophone S 510 radio

Analog ergonomic comfort telephone

The „Ergophone S 510 radio“ meets high standards of quality, flexibility and reliability. Due to the consistently ergonomics, the operation is intuitive and easy. The phone can be expanded by numerous radio units to a comprehensive security system. Special versions of the phone allow the integration of wired call triggers like pear- or cord pull switches.



Radio pendant TRX with cord included

Features

Extra large display

- LCD graphic display, 240 x 64 dots, illuminated
- Display messages in 5 languages switchable
- Indication of call duration, date and time
- Brightness of display adjustable

Extra large keys

- Large ergonomic keys
- Illumination of display and keypad by movement detector
- Key „5“ with orientation light, if keypad illumination off

Telephone features

- Dialling with offline call preparation
- Automatic disconnection of the line by engaged tone recognition
- Redialling from the call list
- Easy menu guidance (suppression of functions reserved to authorized persons. Activation via PIN code)
- Call list of incoming and outgoing calls (20 entries), missed calls are signaled via LED and cleartext
- Call pick-up via radio pendant TRX (pendant activates hands-free mode at the phone)
- Indication of the last incoming number (CLIP)¹
- Phonebook for 50 entries (name and number)
- Call list entries can be stored in the phonebook
- 7 speed dialling keys with name plates
- Service-key (only programmable with PIN-code)

- 10 memories (abbreviated dialling)
- Hands-free mode
- On hook dialling
- Direct call² and automatic direct call²
- Full dialling restriction²
- Dialling restriction of selected phone numbers (5 barring numbers)²
- Dialling restriction excluding speed dialling numbers²
- Keypad leading adapter (aid for dialling)

Audio features

- 10 ringing melodies adjustable
- Volume control by shifting ringer. Extra loud, if desired.
- Full ringer off
- VIP-list/Forbidden number list (each 10 entries)
- Volume control by shifting for loudspeaker and handset via slide switches. Extra loud, if desired.
- Key tone (on/off)
- Handset to hearing aid compatible

Visual displays

- Ringing indication via flashlight (on/off) and via display
- LED for missed calls/fault messages (on/off)

Ergophone S 510 radio Features, continuation

Safety functions

- Emergency call function (separate emergency key with reassurance-LED, 9 emergency numbers can be stored, standard-announcement, individually emergency announcement recording, automatic switch to hands-free mode after acknowledgement via key 5, automatic hang up, special emergency call parameters programmable)³
- Radio emergency call operation (European Social Alarm Frequency 869,2 MHz, up to 19 wireless transmitters can be registered, internal emergency call)³
- Auto answer mode (after calling the phone switches into monitoring mode). Activation via „number of rings“ or CLIP¹ number or special call
- Vital sign function (confirmation of presence)
- Fault messages if the power supply fails, if the telephone line fails, if the battery of the phone or the radio transmitter is almost empty (indicated at the phone or via dialling of stored numbers with fault message announcement)
- Test call with test call announcement (automatic call to stored phone numbers at a specified time)
- Battery pack for phone operation during a power failure
- Log in/out of the caregiver via key (documentation of presence)

Basic settings

- Personal identification number (PIN) programmable
- Dialling mode: tone
- Connection to a PABX possible (programmable signal key flash and CO-line code)
- Exception numbers programmable
- CLIP mode² (rated CLIP or DTMF-CLIP) switchable
- Headset mode
- Date/time/movement-detector/illumination on/off
- Speed dialling keys can be assigned to other functions
- Optional: Wall mounting using a separate wall holder

Configuration/Software-Updates

- Configuration via phone-menu/web-browser and transfer to other phones via SD card
- Software-update via SD card
- Reset
- Check out: All non-PIN-protected functions are set to the factory setting.

Special versions for expansion as an emergency system

Contact input, pear switch connection, priority function, contact output

Components for expansion as a radio emergency system

Radio pendant TRX with cord, radio smoke detector TRX, technical radio transmitter TRX, radio cord pull switch TRX, radio tile TRX, radio sensor-mat TRX

¹) Function must be offered and activated by the network operator.

²) Exception numbers and emergency call numbers can be dialled.

³) In case of telephone network failures or radio interferences call recipients can not be reached.

Technical data

Dimensions (W x D x H):	About 230 x 197 x 80 mm
Weight:	About 850 g
Housing material:	ABS
Telephone connecting cable:	3 metres
Wire assignment:	Pin 3: 1a, pin 4: 1b
Power supply:	Conduction current only for phone operation
Conversation circuit:	Active
Earphone and microphone capsules:	Dynamic earphone/electret microphone
Ringling device:	Variable ringing signal, adjustable volume (variable slide switch) and melody (10 different melodies)
Hands-free device:	Half-duplex
Loudspeaker/handset volume:	Variable, adjustable via slide switch
Display:	Graphic LCD, 240 x 64 dots
Max. length of numbers:	20 digits
AC adapter:	Protection class 2, DC 5V 1A,
Battery:	4,8V, NI-MH 700 mA
Temperature range	
- operation:	0°C up to + 40°C
- for storage:	- 5°C up to + 70°C
Length of the emergency announcement:	About 20 seconds
Movement detector for illumination:	Infrared movement sensor
Illumination of display and dial pad:	High eff. LED in white
Radio receiver system:	869,2 MHz, MFM coding
Coverage of the radio receiver:	Outdoors up to 250 metres / in buildings up to 30 meters

Intended use:	Connection to analog line interfaces of public switched telephone networks and analog ports of PBXs.
Color:	Anthracite

Subject to modifications.

Product color similarly to the illustrations. Doc.-version: 04.